



# ZIBTR PRO

tehnologija obdelave · vpenjalni sistemi

# LITELINE SET-PROMO

**+  
DARILO**

## DOMINANT LT45 TIN

navojni svedri za slepo izvrtino  
globina navoja do 3xD  
oblika **C** 45°

za splošno uporabo  
TIN-prevleka  
posnetje 2 - 3  
toleranca navoja 6HX  
HSSE  
M3 - M12

koda za naročanje  
**B093462**

**SET-CENA  
115.00 EUR**

redna cena: 217.00 EUR

**-47 %**



## VARIANT LT TIN

navojni svedri za skožnjo izvrtino  
globina navoja do 3xD  
oblika **B** ravni

za splošno uporabo  
TIN-prevleka  
posnetje 3 - 5.5  
toleranca navoja 6HX  
HSSE  
M3 - M12

koda za naročanje  
**B093464**

**SET-CENA  
110.00 EUR**

redna cena: 208.50 EUR

**-47 %**



**+  
DARILO**

Izkoristite časovno omejeno akcijo s popustom in prejmite naš  
**LITELINE** komplet po posebni ceni!

Cene so brez DDV. Ponudba velja do razprodaje zaloge!!

Dimenzija	Korak	Dolžina	Steblo Ø	Kvadrat		Splošna uporaba
M 3	0.5	56	3.5	2.7	2.5	
M 4	0.7	63	4.5	3.4	3.3	
M 5	0.8	70	6	4.9	4.2	
M 6	1	80	6	4.9	5	
M 8	1.25	90	8	6.2	6.8	
M 10	1.5	100	10	8	8.5	
M 12	1.75	110	9	7	10.2	

# LITELINE


2024

Your tap for standard applications.

**Order now in our webshop!**

For more than 75 years, we have been developing, producing and distributing high-precision products for the industrial, efficient thread production.


Around the world, customers from the automotive and aerospace industry as well as mechanical engineering and medical technology trust in our solutions.

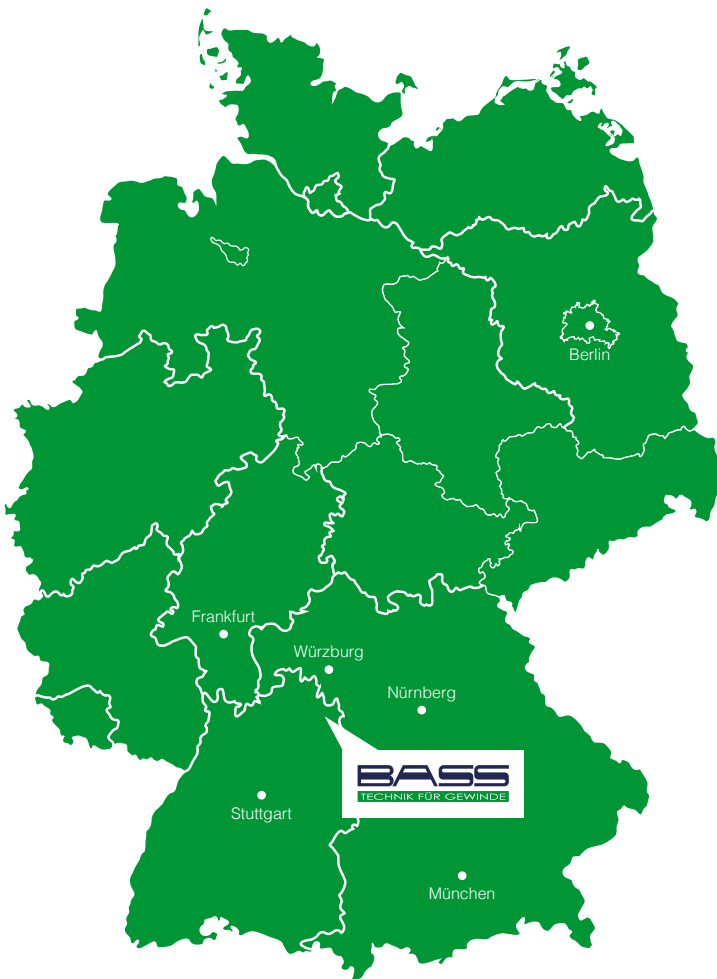

#### BASS GmbH

Technik für Gewinde  
Bass-Strasse 1  
97996 Niederstetten  
Deutschland · Germany

Tel.: +49 7932 892-0  
Fax: +49 7932 892-87  
E-Mail: [info@bass-tools.com](mailto:info@bass-tools.com)  
Web: [www.bass-tools.com](http://www.bass-tools.com)

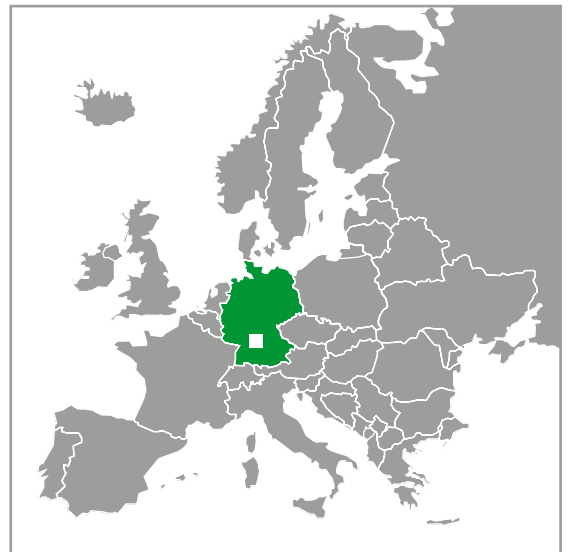

Edition 2 | You can find the current edition of our catalogue on our website.

Printing errors or changes of any kind do not justify any claims. Illustrations may differ from actual items. All data without guarantee.

Our general terms and conditions of sale, delivery and payment conditions apply.  
These can be found on our website at [www.bass-tools.com/tc](http://www.bass-tools.com/tc)

# TABLE OF CONTENTS

GENERAL INFORMATION	2
---------------------	---

APPLICATION TABLE	4
-------------------	---

CUTTING TAPS	6
--------------	---

M	6
---	---

MF	16
----	----

G	24
---	----

UNC	28
-----	----

UNF	30
-----	----



STI (EG-M)	32
------------	----


NPT	34
-----	----




# GENERAL INFORMATION



With our **LITELINE** we offer quality taps in a comprehensive range of sizes, tolerances and chamfer forms. In the product index (right page) you find an overview of all cutting taps included, specialties marked bold.

For pricing information, please refer to our latest price list, which is available separately.

CUTTING TAPS			
	<p><b>VARIANT®</b></p> <ul style="list-style-type: none"> <li>» straight flutes and spiral point</li> <li>» chamfer form B / 3 - 5.5 threads</li> <li>» for through hole</li> <li>» thread depth up to 3xD</li> <li>» chip evacuation forwards</li> </ul>		<p><b>DOMINANT®</b></p> <ul style="list-style-type: none"> <li>» spiral flute 40° - 45°</li> <li>» chamfer form C / 2 - 3 threads</li> <li>» chamfer form E / 1.5 - 2 threads</li> <li>» for blind hole</li> <li>» thread depth up to 3xD</li> <li>» chip evacuation backwards</li> </ul>

ABBREVIATIONS		
LH = Left hand 	SL = Tools with long shank	HSSE = High speed steel

TYPES OF BORE HOLES					
	for through holes (chamfer form B)		for blind holes with normal thread chamfer (chamfer form C)		for blind holes with short thread chamfer (chamfer form E)

SHANK TYPES			
<b>1</b>	reinforced shank (e.g. DIN 371)	<b>2</b>	reduced shank (e.g. DIN 376)
			

PRODUCT INDEX					
type	series	model	chamfer	thread tol.	page
<b>M – METRIC COARSE THREAD</b>					
through hole	VARIANT LT	TIN	B	4HX	6
through hole	VARIANT LT	TIN	B	6HX	6-7
through hole	VARIANT LT	LH TIN	B	6HX	8
through hole	VARIANT LT	TIN SL	B	6HX	9
through hole	VARIANT LT	TIN	B	6GX	6-7
through hole	VARIANT LT	TIN	B	7GX	6-7
through hole	VARIANT LT	TIN	B	6H+0.1	14
blind hole	DOMINANT LT45	TIN	C	4HX	10
blind hole	DOMINANT LT45	TIN	C	6HX	10-11
blind hole	DOMINANT LT45	LH TIN	C	6HX	12
blind hole	DOMINANT LT45	TIN	C	6GX	10-11
blind hole	DOMINANT LT45	TIN	C	7GX	10-11
blind hole	DOMINANT LT45	TIN SL	C	6HX	13
blind hole	DOMINANT LT45	TIN	C	6H+0.1	15
blind hole	DOMINANT LT45	TIN	E	6HX	12
<b>MF – METRIC FINE THREAD</b>					
through hole	VARIANT LT	TIN	B	6HX	16-17
through hole	VARIANT LT	LH TIN	B	6HX	16-17
through hole	VARIANT LT	TIN SL	B	6HX	18
blind hole	DOMINANT LT45	TIN	C	6HX	20-21
blind hole	DOMINANT LT45	LH TIN	C	6HX	20-21
blind hole	DOMINANT LT45	TIN SL	C	6HX	22
<b>G – BRITISH STANDARD PIPE THREAD</b>					
through hole	VARIANT LT	TIN	B	–	24
through hole	VARIANT LT	TIN SL	B	–	25
blind hole	DOMINANT LT45	TIN	C	–	26
blind hole	DOMINANT LT45	TIN	E	–	26
blind hole	DOMINANT LT45	TIN SL	C	–	27
<b>UNC – UNIFIED COARSE THREAD</b>					
through hole	VARIANT LT	TIN	B	2BX	28
blind hole	DOMINANT LT45	TIN	C	2BX	29
<b>UNF – UNIFIED FINE THREAD</b>					
through hole	VARIANT LT	TIN	B	2BX	30
blind hole	DOMINANT LT45	TIN	C	2BX	31
<b>EG-M – STI METRIC ISO THREAD</b>					
through hole	VARIANT LT	TIN	B	6HX mod	32
blind hole	DOMINANT LT45	TIN	E	6HX mod	33
<b>NPT – AMERICAN STANDARD TAPER PIPE THREAD</b>					
blind hole	DOMINANT LT40	TIN	C	–	34




# APPLICATION TABLE

## number of revolutions (rpm)

$$n = \frac{v_c \cdot 1000}{\pi \cdot d_1}$$

## cutting speed

$$v_c = \frac{n \cdot \pi \cdot d_1}{1000}$$

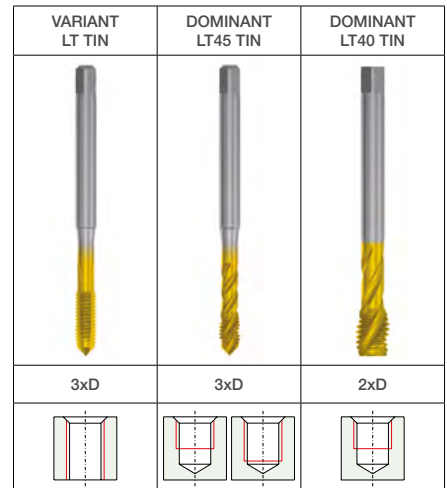

### How to proceed

1. Select hole shape
2. Select application
3. Search for cutting speed (vc m/min)








	Application	Examples of materials	R <sub>m</sub> N/mm <sup>2</sup>	HB	HRC	vc m/min (Tool well suitable – tool suitable)			
P	<b>Steel materials</b>								
	Magnetic soft steel	FeP01	> 100 < 450			20 - 30	20 - 30	2 - 8	
	Construction steel / case hardening steel	En40B	> 300 < 700			20 - 30	20 - 30	2 - 8	
	Carbon steel	080M46	> 400 < 950			20 - 30	20 - 30	2 - 8	
	Alloyed / heat-treatable steel	En19A	> 450 < 950			15 - 30	15 - 30		
	Alloyed steel	BD2	> 800 < 1250	> 235 < 370	> 22 < 40	10 - 20	10 - 20		
M	<b>Stainless steel</b>								
	Ferritic / martensitic steel	420S37	> 450 < 1200			6 - 12	6 - 12		
	Austenitic steel	320S18	> 400 < 950			6 - 12	6 - 12		
	High temperature steel	301S81	> 850 < 1550	> 250 < 455	> 25 < 48				
K	<b>Cast iron</b>								
	Grey cast iron	EN-GJL-200	> 150 < 1000	> 100 < 300					
	Cast iron with nodular graphite	Grade 420/12	> 350 < 1000	> 100 < 350		8 - 20	8 - 20	2 - 8	
	Malleable cast iron	EN-GJMB-350-10	> 300 < 700	> 100 < 200		15 - 25	15 - 25	1 - 8	
	Cast iron with vermicular graphite	EN-GJV-300	> 700 < 1000	> 200 < 300	> 20 < 32	5 - 15	-		
N	<b>Copper</b>								
	Copper non-alloyed	Cu-ETP-2 C 101	> 200 < 400	> 60 < 120		10 - 25	10 - 25		
	Brass (short chipping)	CZ 120	> 350 < 700	> 100 < 200		15 - 35	-		
	Brass (long chipping)	CZ 108	> 150 < 700	> 45 < 200		15 - 35	15 - 35	1 - 8	
	Copper-alu-nickel alloyed (short chipping)	CN 102	> 150 < 700	> 45 < 200		10 - 20	10 - 20		
	Copper-alu-nickel alloyed (long chipping)	CA 104	> 500 < 750	> 150 < 220		15 - 25	15 - 25		
	Special copper alloyed ≤ Ampco 20	CA 105	> 550 < 650	> 160 < 190					
	Special copper alloyed ≥ Ampco 21	AMPCO 21	> 700 < 1500	> 200 < 440	> 21 < 47				
	<b>Aluminium / Magnesium</b>								
	Alu wrought alloy Si ≤0,5%	1B	> 100 < 700	> 30 < 200					
	Alu alloyed Si ≤6%	LM22	> 150 < 700	> 45 < 200		15 - 40	15 - 40	1 - 8	
	Alu alloyed Si >6%	LM9	> 150 < 900	> 45 < 265		15 - 40	15 - 40	1 - 8	
	Magnesium wrought alloy	MAG 101	> 150 < 500	> 45 < 150					
	<b>Synthetics</b>								
	Thermoplastic (long chipping)	Styreme	> 20 < 80						
	Duroplastic (short chipping)	Toufnell	> 80 < 110						
	Fibre-reinforced plastic	Carbonfibre	> 800 < 1500	> 235 < 440					
<b>Special materials</b>									
Cobalt alloyed		> 400 < 2000	> 120 < 590						
Tungsten alloyed		> 1400 < 1800	> 410 < 530	> 44 < 52					
TiC-hard material			> 440 < 495	> 47 < 50					
Graphite		> 38 < 60							
S	<b>Titanium</b>								
	Titanium non-alloyed	TA.2	> 300 < 700	> 90 < 200					
	Titanium alloyed	TA.10	> 450 < 900	> 135 < 265	> 14 < 27				
	Titanium alloyed	TA.10	> 900 < 1250	> 265 < 370	> 27 < 40				
	<b>Nickel</b>								
	Nickel non-alloyed	BS3072: NA11	> 400 < 600	> 120 < 175					
	Nickel alloyed	BS3072: NA13	> 400 < 1200	> 120 < 350	> 12 < 39				
Nickel alloyed	INCONEL alloy718	> 1200 < 1550	> 350 < 455	> 39 < 48					
H	<b>Steel materials</b>								
	Alloyed steel	En19A	> 1100 < 1400	> 325 < 410	> 34 < 45				
	Alloyed steel	251A58	> 1200 < 1550	> 350 < 455	> 39 < 48				
	Hardened steel	708A30	> 1600 < 2000	> 470 < 590	> 48 < 56				
	Hardened steel	BA2			> 56 < 63				

**NOTES**


A large grid of small dots, intended for taking notes. The grid consists of approximately 25 columns and 40 rows of dots, covering most of the page area.









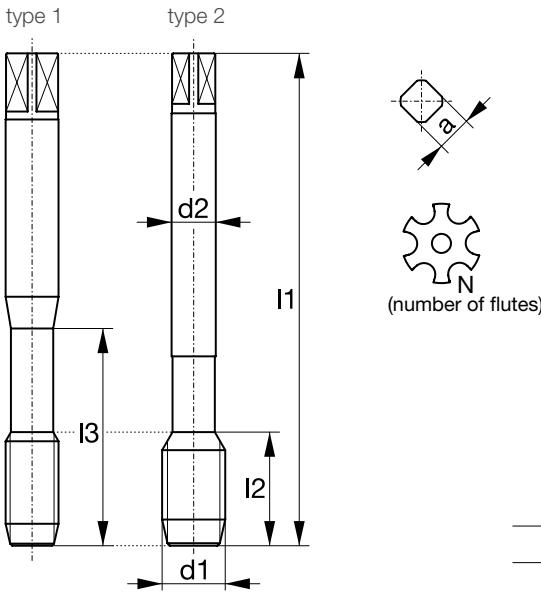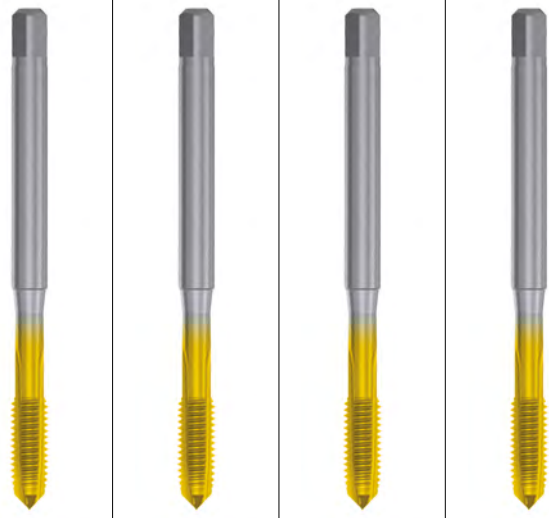




**CUTTING TAPS FOR THROUGH HOLE**

<b>M</b>	ISO Metric coarse thread DIN 13		series	VARIANT LT	VARIANT LT	VARIANT LT	VARIANT LT
			model	TIN	TIN	TIN	TIN
			material	HSSE	HSSE	HSSE	HSSE
							
			chamfer	B / 3-5.5	B / 3-5.5	B / 3-5.5	B / 3-5.5
			thread tol.	4HX	6HX	<b>6GX</b>	<b>7GX</b>
			shank tol.	h9	h9	h9	h9
			thread depth	3xD	3xD	3xD	3xD
<b>General dimensions DIN 371 / DIN 376</b>			bore hole				
			P	10 - 30	10 - 30	10 - 30	10 - 30
			M	6 - 12	6 - 12	6 - 12	6 - 12
			K	5 - 25	5 - 25	5 - 25	5 - 25
			N	10 - 40	10 - 40	10 - 40	10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

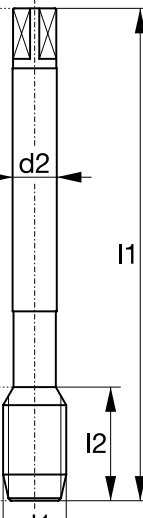
Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number		
M 1	0.25	40	5	-	2.5	2.1	2	1	0.75	780000		
M 1.1	0.25	40	5	-	2.5	2.1	2	1	0.85	780001		
M 1.2	0.25	40	5	-	2.5	2.1	2	1	0.95	780002		
M 1.4	0.3	40	7	-	2.5	2.1	2	1	1.1	780003		
M 1.6	0.35	40	8	-	2.5	2.1	2	1	1.25	780004		
M 1.7	0.35	40	8	-	2.5	2.1	2	1	1.3	780005		
M 1.8	0.35	40	8	-	2.5	2.1	2	1	1.45	780006		
M 2	0.4	45	8	-	2.8	2.1	2	1	1.6	780007	780036	780048
M 2.2	0.45	45	9	-	2.8	2.1	2	1	1.75	780008		
M 2.3	0.4	45	9	-	2.8	2.1	2	1	1.9	780009		
M 2.5	0.45	50	9	-	2.8	2.1	2	1	2.05	780010		
M 2.6	0.45	50	9	-	2.8	2.1	2	1	2.1	780011		
M 3	0.5	56	11	18	3.5	2.7	3	1	2.5	780012	780037	780049
M 3	0.5	56	11	-	2.2	-	3	2	2.5	780030		
M 3.5	0.6	56	12	20	4	3	3	1	2.9	780013		
M 4	0.7	63	13	21	4.5	3.4	3	1	3.3	780014	780038	780050
M 4	0.7	63	13	-	2.8	2.1	3	2	3.3	780031		
M 4.5	0.75	70	16	25	6	4.9	3	1	3.7	780015		
M 5	0.8	70	16	25	6	4.9	3	1	4.2	780016	780039	780051
M 5	0.8	70	16	-	3.5	2.7	3	2	4.2	780032		

**CUTTING TAPS FOR THROUGH HOLE**





<b>M</b>	ISO Metric coarse thread DIN 13		series		<b>VARIANT LT TIN HSSE</b>	<b>VARIANT LT TIN HSSE</b>	<b>VARIANT LT TIN HSSE</b>
			model				
			material				
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>type 1</p>  </div> <div style="text-align: center;"> <p>type 2</p>  </div> </div> <div style="margin-top: 20px;">  <p style="text-align: center;"><math>a</math></p>  <p style="text-align: center;"><math>N</math> (number of flutes)</p> </div>			  				
chamfer				B / 3-5.5	B / 3-5.5	B / 3-5.5	
thread tol.				6HX	<b>6GX</b>	<b>7GX</b>	
shank tol.				h9	h9	h9	
thread depth				3xD	3xD	3xD	
bore hole							
P				10-30	10-30	10-30	
M				6-12	6-12	6-12	
K				5-25	5-25	5-25	
N				10-40	10-40	10-40	

**General dimensions  
DIN 371 / DIN 376**


**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number		
M 6	1	80	19	30	6	4.9	3	1	5	780017	780040	780052
M 6	1	80	19	-	4.5	3.4	3	2	5	780033		
M 7	1	80	19	30	7	5.5	3	1	6	780018		
M 8	1.25	90	22	35	8	6.2	3	1	6.8	780019	780041	780053
M 8	1.25	90	22	-	6	4.9	3	2	6.8	780034		
M 10	1.5	100	24	39	10	8	3	1	8.5	780020	780042	780054
M 10	1.5	100	24	-	7	5.5	3	2	8.5	780035		
M 12	1.75	110	28	-	9	7	3	2	10.2	780021	780043	780055
M 14	2	110	30	-	11	9	3	2	12	780022	780044	
M 16	2	110	32	-	12	9	3	2	14	780023	780045	780056
M 18	2.5	125	34	-	14	11	3	2	15.5	780024		
M 20	2.5	140	34	-	16	12	3	2	17.5	780025	780046	
M 22	2.5	140	34	-	18	14.5	3	2	19.5	780026		
M 24	3	160	38	-	18	14.5	3	2	21	780027	780047	
M 27	3	160	38	-	20	16	4	2	24	780028		
M 30	3.5	180	45	-	22	18	4	2	26.5	780029		

**CUTTING TAPS FOR THROUGH HOLE**
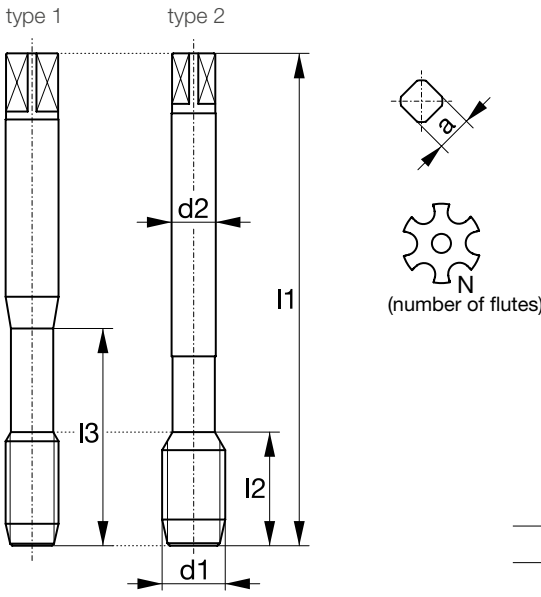
<b>M</b>	ISO Metric coarse thread DIN 13		series	<b>VARIANT</b> LT LH TIN HSSE			
			model				
			material				
type 1      type 2 							
			chamfer	B / 3-5.5			
			thread tol.	6HX			
			shank tol.	h9			
			thread depth	3xD			
<b>General dimensions</b> <b>DIN 371 / DIN 376</b>			bore hole				
			P	10 - 30			
			M	6 - 12			
			K	5 - 25			
			N	10 - 40			



**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
M 3	0.5	56	11	18	3.5	2.7	3	1	2.5	780080
M 4	0.7	63	13	21	4.5	3.4	3	1	3.3	780081
M 5	0.8	70	16	25	6	4.9	3	1	4.2	780082
M 6	1	80	19	30	6	4.9	3	1	5	780083
M 8	1.25	90	22	35	8	6.2	3	1	6.8	780084
M 10	1.5	100	24	39	10	8	3	1	8.5	780085
M 12	1.75	110	28	-	9	7	3	2	10.2	780086
M 14	2	110	30	-	11	9	3	2	12	780087
M 16	2	110	32	-	12	9	3	2	14	780088
M 20	2.5	140	34	-	16	12	3	2	17.5	780089
M 24	3	160	38	-	18	14.5	3	2	21	780090

**CUTTING TAPS FOR THROUGH HOLE**
**M**

 ISO Metric coarse  
thread DIN 13


series
model
material

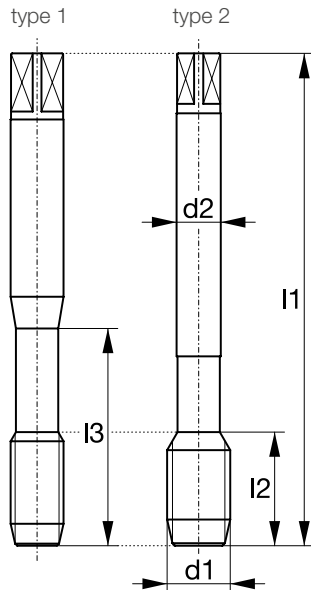**VARIANT**  
 LT  
**TIN SL**  
 HSSE


chamfer B / 3-5.5

thread tol. 6HX

shank tol. h9

thread depth 3xD

bore hole



**General dimensions**  
 ~ DIN 371/ ~ DIN 376

P	10 - 30
M	6 - 12
K	5 - 25
N	10 - 40






**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number
M 3	0.5	100	11	20	3.5	2.7	3	1	2.5	780065
M 4	0.7	125	13	27	4.5	3.4	3	1	3.3	780066
M 4	0.7	125	13	-	2.8	2.1	3	2	3.3	780075
M 5	0.8	160	16	33	6	4.9	3	1	4.2	780067
M 5	0.8	160	16	-	3.5	2.7	3	2	4.2	780076
M 6	1	160	19	40	6	4.9	3	1	5	780068
M 6	1	160	19	-	4.5	3.4	3	2	5	780077
M 8	1.25	180	22	52	8	6.2	3	1	6.8	780069
M 8	1.25	180	22	-	6	4.9	3	2	6.8	780078
M 10	1.5	200	24	65	10	8	3	1	8.5	780070
M 10	1.5	200	24	-	7	5.5	3	2	8.5	780079
M 12	1.75	200	28	-	9	7	3	2	10.2	780071
M 14	2	200	30	-	11	9	3	2	12	780072
M 16	2	200	32	-	12	9	3	2	14	780073
M 20	2.5	200	34	-	16	12	3	2	17.5	780074

**CUTTING TAPS FOR BLIND HOLE**

<b>M</b>	ISO Metric coarse thread DIN 13		series	<b>DOMINANT LT45</b>	<b>DOMINANT LT45</b>	<b>DOMINANT LT45</b>	<b>DOMINANT LT45</b>
			model	<b>TIN</b>	<b>TIN</b>	<b>TIN</b>	<b>TIN</b>
			material	HSSE	HSSE	HSSE	HSSE


  
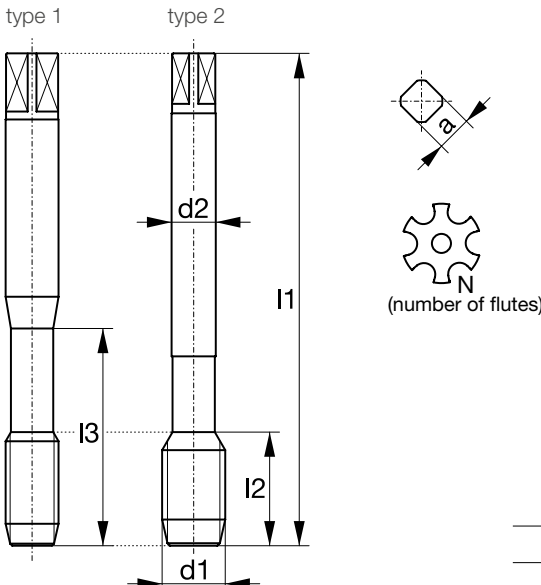
<p>type 1      type 2</p> 	chamfer	C / 2-3	C / 2-3	C / 2-3	C / 2-3
	thread tol.	4HX	6HX	<b>6GX</b>	<b>7GX</b>
	shank tol.	h9	h9	h9	h9
	thread depth	3xD	3xD	3xD	3xD
	bore hole				
	P	10 - 30	10 - 30	10 - 30	10 - 30
M	6 - 12	6 - 12	6 - 12	6 - 12	
K	8 - 25	8 - 25	8 - 25	8 - 25	
N	10 - 40	10 - 40	10 - 40	10 - 40	

**General dimensions**  
**DIN 371 / DIN 376**

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
M 1	0.25	40	5	-	2.5	2.1	2	1	0.75	780091
M 1.1	0.25	40	5	-	2.5	2.1	2	1	0.85	780092
M 1.2	0.25	40	5	-	2.5	2.1	2	1	0.95	780093
M 1.4	0.3	40	6	-	2.5	2.1	2	1	1.1	780094
M 1.6	0.35	40	7	-	2.5	2.1	2	1	1.25	780095
M 1.7	0.35	40	8	-	2.5	2.1	2	1	1.3	780096
M 1.8	0.35	40	8	-	2.5	2.1	2	1	1.45	780097
M 2	0.4	45	3.2	10	2.8	2.1	2	1	1.6	780098      780139      780151
M 2.2	0.45	45	3.6	11	2.8	2.1	2	1	1.75	780099
M 2.3	0.4	45	3.6	12	2.8	2.1	2	1	1.9	780100
M 2.5	0.45	50	3.6	13	2.8	2.1	2	1	2.05	780101
M 2.6	0.45	50	3.6	13	2.8	2.1	2	1	2.1	780102
M 3	0.5	56	4	18	3.5	2.7	3	1	2.5	780103      780140      780152
M 3	0.5	56	4	-	2.2	-	3	2	2.5	780121
M 3.5	0.6	56	4.8	20	4	3	3	1	2.9	780104
M 4	0.7	63	5.6	21	4.5	3.4	3	1	3.3	780105      780141      780153
M 4	0.7	63	5.6	-	2.8	2.1	3	2	3.3	780122
M 4.5	0.75	70	6	25	6	4.9	3	1	3.7	780106
M 5	0.8	70	6.4	25	6	4.9	3	1	4.2	780142      780154
M 5	0.8	70	6.4	-	3.5	2.7	3	2	4.2	780123
M 5	0.8	70	6.4	25	6	4.9	3	1	4.2	780107

**CUTTING TAPS FOR BLIND HOLE**

**M**

ISO Metric coarse thread DIN 13





series  
model  
material

**DOMINANT**  
LT45  
**TIN**  
HSSE

**DOMINANT**  
LT45  
**TIN**  
HSSE

**DOMINANT**  
LT45  
**TIN**  
HSSE

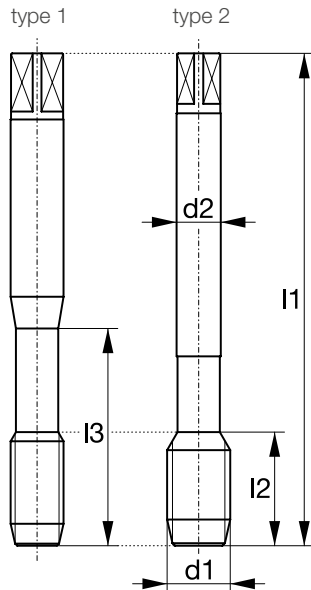

chamfer

C / 2-3

C / 2-3

C / 2-3

thread tol.

6HX

**6GX**

**7GX**

shank tol.

h9

h9

h9

thread depth

3xD

3xD

3xD

bore hole



General dimensions  
**DIN 371 / DIN 376**

P

10 - 30

10 - 30

10 - 30

M

6 - 12

6 - 12

6 - 12

K

8 - 25

8 - 25

8 - 25

N

10 - 40

10 - 40

10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number		
M 6	1	80	8	30	6	4.9	3	1	5	780108	780143	780155
M 6	1	80	8	-	4.5	3.4	3	2	5	780124		
M 7	1	80	8	30	7	5.5	3	1	6	780109		
M 8	1.25	90	10	35	8	6.2	3	1	6.8	780110	780144	780156
M 8	1.25	90	10	-	6	4.9	3	2	6.8	780125		
M 10	1.5	100	12	39	10	8	3	1	8.5	780111	780145	780157
M 10	1.5	100	12	-	7	5.5	3	2	8.5	780126		
M 12	1.75	110	14	-	9	7	3	2	10.2	780112	780146	780158
M 14	2	110	16	-	11	9	3	2	12	780113	780147	
M 16	2	110	16	-	12	9	3	2	14	780114	780148	780159
M 18	2.5	125	25	-	14	11	4	2	15.5	780115		
M 20	2.5	140	25	-	16	12	4	2	17.5	780116	780149	
M 22	2.5	140	25	-	18	14.5	4	2	19.5	780117		
M 24	3	160	30	-	18	14.5	4	2	21	780118	780150	
M 27	3	160	36	-	20	16	4	2	24	780119		
M 30	3.5	180	42	-	22	18	4	2	26.5	780120		

**CUTTING TAPS FOR BLIND HOLE**

**M**

ISO Metric coarse thread DIN 13






series

model

material

**DOMINANT  
LT45  
TIN  
HSSE**

**DOMINANT  
LT45  
LH TIN  
HSSE**

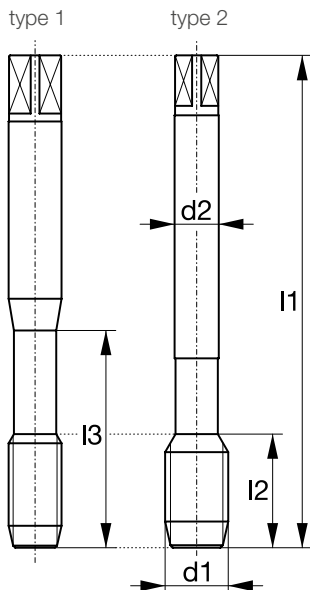

(number of flutes)



chamfer

thread tol.

shank tol.

thread depth

bore hole



General dimensions

**DIN 371 / DIN 376**

P

M

K

N

10 - 30

6 - 12

8 - 25

10 - 40

10 - 30

6 - 12

8 - 25

10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
M 2	0.4	45	3.2	10	2.8	2.1	2	1	1.6	780127
M 3	0.5	56	4	18	3.5	2.7	3	1	2.5	780128 780183
M 4	0.7	63	5.6	21	4.5	3.4	3	1	3.3	780129 780184
M 5	0.8	70	6.4	25	6	4.9	3	1	4.2	780130 780185
M 6	1	80	8	30	6	4.9	3	1	5	780131 780186
M 8	1.25	90	10	35	8	6.2	3	1	6.8	780132 780187
M 10	1.5	100	12	39	10	8	3	1	8.5	780133 780188
M 12	1.75	110	14	-	9	7	3	2	10.2	780134 780189
M 14	2	110	16	-	11	9	3	2	12	780135 780190
M 16	2	110	16	-	12	9	3	2	14	780136 780191
M 20	2.5	140	25	-	16	12	4	2	17.5	780137 780192
M 24	3	160	30	-	18	14.5	4	2	21	780138 780193



**CUTTING TAPS FOR BLIND HOLE**

**M**

ISO Metric coarse thread DIN 13



series

**DOMINANT  
LT45**

model




**TIN SL**

material

**HSSE**

type 1

type 2

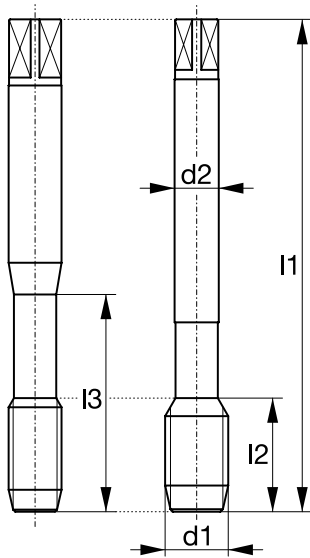

(number of flutes)



chamfer

C / 2-3

thread tol.

6HX

shank tol.

h9

thread depth

3xD

General dimensions

~ DIN 371 / ~ DIN 376

bore hole



P

10 - 30

M

6 - 12

K

8 - 25

N

10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number
M 3	0.5	100	4	18	3.5	2.7	3	1	2.5	780168
M 4	0.7	125	5.6	21	4.5	3.4	3	1	3.3	780169
M 4	0.7	125	5.6	-	2.8	2.1	3	2	3.3	780178
M 5	0.8	160	6.4	25	6	4.9	3	1	4.2	780170
M 5	0.8	160	6.4	-	3.5	2.7	3	2	4.2	780179
M 6	1	160	8	30	6	4.9	3	1	5	780171
M 6	1	160	8	-	4.5	3.4	3	2	5	780180
M 8	1.25	180	10	35	8	6.2	3	1	6.8	780172
M 8	1.25	180	10	-	6	4.9	3	2	6.8	780181
M 10	1.5	200	12	39	10	8	3	1	8.5	780173
M 10	1.5	200	12	-	7	5.5	3	2	8.5	780182
M 12	1.75	200	14	-	9	7	3	2	10.2	780174
M 14	2	200	16	-	11	9	3	2	12	780175
M 16	2	200	16	-	12	9	3	2	14	780176
M 20	2.5	200	25	-	16	12	4	2	17.5	780177




**CUTTING TAPS FOR THROUGH HOLE**
**M**

ISO Metric coarse thread DIN 13



series
model
material

VARIANT
LT
TIN
HSSE

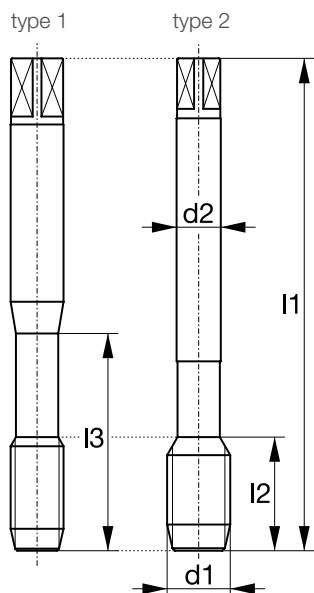
**General dimensions  
DIN 371 / DIN 376**

chamfer	B / 3-5.5			
thread tol.	6H+0.1			
shank tol.	h9			
thread depth	3xD			
bore hole				
P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
M 3	0.5	56	11	18	3.5	2.7	3	1	2.6	780057
M 4	0.7	63	13	21	4.5	3.4	3	1	3.4	780058
M 5	0.8	70	16	25	6	4.9	3	1	4.3	780059
M 6	1	80	19	30	6	4.9	3	1	5.1	780060
M 8	1.25	90	22	35	8	6.2	3	1	6.9	780061
M 10	1.5	100	24	39	10	8	3	1	8.6	780062
M 12	1.75	110	28	-	9	7	3	2	10.3	780063
M 16	2	110	32	-	12	9	3	2	14.1	780064

**CUTTING TAPS FOR BLIND HOLE**




**M**

ISO Metric coarse thread DIN 13



series  
model  
material

**DOMINANT**  
**LT45**  
**TIN**  
**HSSE**

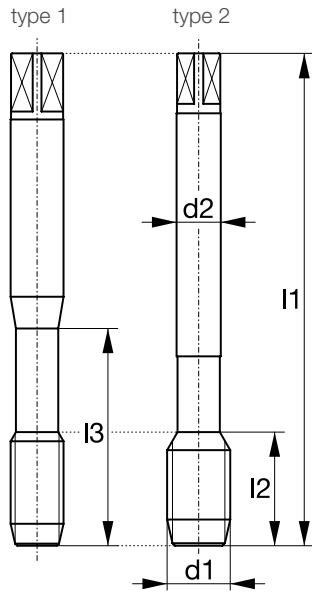

chamfer	C / 2-3
thread tol.	6H+0.1
shank tol.	h9
thread depth	3xD
bore hole	

General dimensions  
**DIN 371 / DIN 376**

P	10 - 30			
M	6 - 12			
K	8 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
M 3	0.5	56	4	18	3.5	2.7	3	1	2.6	780160
M 4	0.7	63	5.6	21	4.5	3.4	3	1	3.4	780161
M 5	0.8	70	6.4	25	6	4.9	3	1	4.3	780162
M 6	1	80	8	30	6	4.9	3	1	5.1	780163
M 8	1.25	90	10	35	8	6.2	3	1	6.9	780164
M 10	1.5	100	12	39	10	8	3	1	8.6	780165
M 12	1.75	110	14	-	9	7	3	2	10.3	780166
M 16	2	110	16	-	12	9	3	2	14.1	780167

**CUTTING TAPS FOR THROUGH HOLE**

**MF**



ISO Metric fine thread DIN 13



series  
model  
material

VARIANT  
LT  
TIN  
HSSE

VARIANT  
LT  
LH TIN  
HSSE

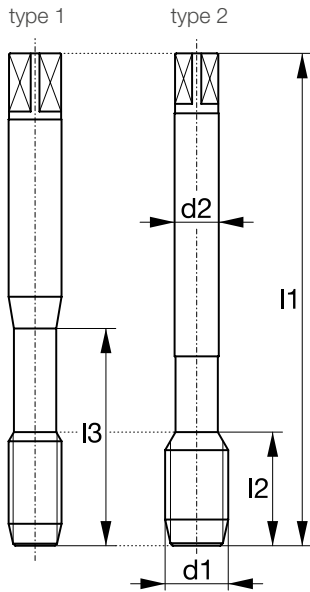

General dimensions  
DIN 374

chamfer	B / 3-5.5	B / 3-5.5		
thread tol.	6HX	6HX		
shank tol.	h9	h9		
thread depth	3xD	3xD		
bore hole				
P	10 - 30	10 - 30		
M	6 - 12	6 - 12		
K	5 - 25	5 - 25		
N	10 - 40	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

$\text{Ø}d_1$	P	$l_1$	$l_2$	$l_3$	$\text{Ø}d_2$	a	N	type		identification number	
MF 2.5	0.35	50	9	-	1.8	-	2	2	2.15	780194	
MF 2.6	0.35	50	9	-	1.8	-	2	2	2.25	780195	
MF 3	0.35	56	8	-	2.2	-	3	2	2.65	780196	
MF 3.5	0.35	56	9	-	2.5	2.1	3	2	3.15	780197	
MF 4	0.35	63	10	-	2.8	2.1	3	2	3.65	780198	
MF 4	0.5	63	10	-	2.8	2.1	3	2	3.5	780199	
MF 4.5	0.5	70	12	-	3.5	2.7	3	2	4	780200	
MF 5	0.5	70	16	-	3.5	2.7	3	2	4.5	780201	
MF 6	0.5	80	14	-	4.5	3.4	3	2	5.5	780202	
MF 6	0.75	80	14	-	4.5	3.4	3	2	5.2	780203	
MF 6.5	0.75	80	14	-	5.5	4.3	3	2	5.75	780204	
MF 7	0.5	80	14	-	5.5	4.3	3	2	6.5	780205	
MF 8	0.75	80	22	-	6	4.9	3	2	7.2	780206	
MF 8	1	90	22	-	6	4.9	3	2	7	780207	780235
MF 9	1	90	22	-	7	5.5	3	2	8	780208	
MF 10	0.75	90	20	-	7	5.5	3	2	9.2	780209	
MF 10	1	90	20	-	7	5.5	3	2	9	780210	780236
MF 10	1.25	100	24	-	7	5.5	3	2	8.8	780211	780237
MF 11	1	90	20	-	8	6.2	3	2	10	780212	

**CUTTING TAPS FOR THROUGH HOLE**

**MF**



ISO Metric fine thread DIN 13



series  
model  
material

VARIANT  
LT  
TIN  
HSSE

VARIANT  
LT  
LH TIN  
HSSE

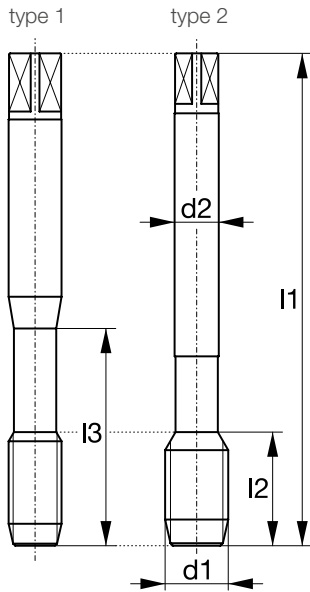

General dimensions  
DIN 374

chamfer	B / 3-5.5	B / 3-5.5		
thread tol.	6HX	6HX		
shank tol.	h9	h9		
thread depth	3xD	3xD		
bore hole				
P	10 - 30	10 - 30		
M	6 - 12	6 - 12		
K	5 - 25	5 - 25		
N	10 - 40	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number	
MF 12	0.5	100	22	-	9	7	3	2	11.5	780213	
MF 12	0.75	100	22	-	9	7	3	2	11.2	780214	
MF 12	1	100	22	-	9	7	3	2	11	780215	
MF 12	1.25	100	22	-	9	7	3	2	10.8	780216	780238
MF 12	1.5	100	22	-	9	7	3	2	10.5	780217	780239
MF 13	1	100	22	-	11	9	3	2	12	780218	
MF 14	1.5	100	22	-	11	9	3	2	12.5	780219	
MF 16	1.5	100	22	-	12	9	3	2	14.5	780220	780240
MF 18	1	110	25	-	14	11	3	2	17	780221	
MF 18	1.5	110	25	-	14	11	3	2	16.5	780222	
MF 20	1.5	125	25	-	16	12	3	2	18.5	780223	780241
MF 22	1.5	125	25	-	18	14.5	3	2	20.5	780224	
MF 24	1.5	140	28	-	18	14.5	3	2	22.5	780225	780242
MF 26	1.5	140	28	-	18	14.5	4	2	24.5	780226	
MF 30	1.5	150	28	-	22	18	4	2	28.5	780227	

**CUTTING TAPS FOR THROUGH HOLE**



**MF**

ISO Metric fine thread DIN 13



series  
model  
material

VARIANT  
LT  
TIN SL  
HSSE

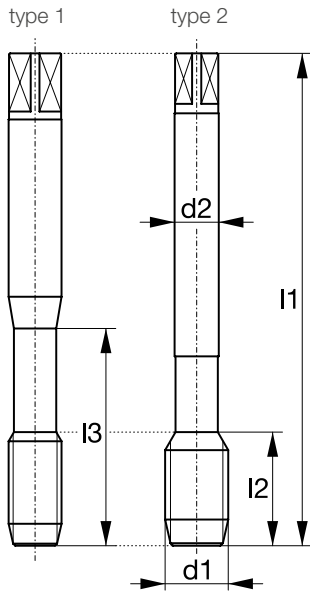

General dimensions  
~ DIN 374

chamfer	B / 3-5.5			
thread tol.	6HX			
shank tol.	h9			
thread depth	3xD			
bore hole				
P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
MF 8	1	180	22	-	6	4.9	3	2	7	780228
MF 10	1	180	20	-	7	5.5	3	2	9	780229
MF 10	1.25	200	24	-	7	5.5	3	2	8.8	780230
MF 12	1.25	200	22	-	9	7	3	2	10.8	780231
MF 12	1.5	200	22	-	9	7	3	2	10.5	780232
MF 16	1.5	200	22	-	12	9	3	2	14.5	780233
MF 20	1.5	250	25	-	16	12	3	2	18.5	780234

**NOTES**

A large grid of small dots for taking notes, covering the majority of the page.



**CUTTING TAPS FOR BLIND HOLE**

**MF**



ISO Metric fine thread DIN 13



series  
model  
material

**DOMINANT LT45**  
**TIN**  
HSSE

**DOMINANT LT45**  
**LH TIN**  
HSSE

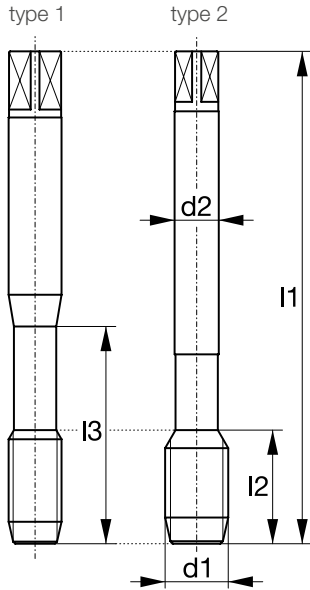

**General dimensions  
DIN 374**

chamfer	C / 2-3	C / 2-3		
thread tol.	6HX	6HX		
shank tol.	h9	h9		
thread depth	3xD	3xD		
bore hole				
P	10 - 30	10 - 30		
M	6 - 12	6 - 12		
K	8 - 25	8 - 25		
N	10 - 40	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

$\text{\O}d_1$	P	$l_1$	$l_2$	$l_3$	$\text{\O}d_2$	a	N	type		identification number	
MF 2.5	0.35	50	9	-	1.8	-	2	2	2.15	780243	
MF 2.6	0.35	50	9	-	1.8	-	2	2	2.25	780244	
MF 3	0.35	56	4	-	2.2	-	3	2	2.65	780245	
MF 3.5	0.35	56	4.8	-	2.5	2.1	3	2	3.15	780246	
MF 4	0.35	63	5.6	-	2.8	2.1	3	2	3.65	780247	
MF 4	0.5	63	5.6	-	2.8	2.1	3	2	3.5	780248	
MF 4.5	0.5	70	6	-	3.5	2.7	3	2	4	780249	
MF 5	0.5	70	6.4	-	3.5	2.7	3	2	4.5	780250	
MF 6	0.5	80	8	-	4.5	3.4	3	2	5.5	780251	
MF 6	0.75	80	8	-	4.5	3.4	3	2	5.25	780252	
MF 6.5	0.75	80	8	-	5.5	4.3	3	2	5.75	780253	
MF 7	0.5	80	8	-	5.5	4.3	3	2	6.5	780254	
MF 8	0.75	80	8	-	6	4.9	3	2	7.25	780255	
MF 8	1	90	10	-	6	4.9	3	2	7	780256	780284
MF 9	1	90	10	-	7	5.5	3	2	8	780257	
MF 10	0.75	90	10	-	7	5.5	3	2	9.25	780258	
MF 10	1	90	10	-	7	5.5	3	2	9	780259	780285
MF 10	1.25	100	12	-	7	5.5	3	2	8.75	780260	780286
MF 11	1	90	12	-	8	6.2	3	2	10	780261	




**CUTTING TAPS FOR BLIND HOLE**
**MF**

 ISO Metric fine  
thread DIN 13


series
model
material

<b>DOMINANT LT45</b>
<b>TIN</b>
HSSE

<b>DOMINANT LT45</b>
<b>LH TIN</b>
HSSE

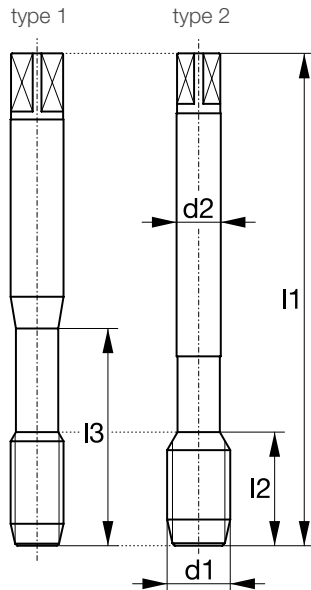
**General dimensions  
DIN 374**

chamfer	C / 2-3	C / 2-3		
thread tol.	6HX	6HX		
shank tol.	h9	h9		
thread depth	3xD	3xD		
bore hole				
P	10 - 30	10 - 30		
M	6 - 12	6 - 12		
K	8 - 25	8 - 25		
N	10 - 40	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number	
MF 12	0.5	100	8	-	9	7	3	2	11.5	780262	
MF 12	0.75	100	10	-	9	7	3	2	11.25	780263	
MF 12	1	100	12	-	9	7	3	2	11	780264	
MF 12	1.25	100	12	-	9	7	3	2	10.75	780265	780287
MF 12	1.5	100	14	-	9	7	3	2	10.5	780266	780288
MF 13	1	100	12	-	11	9	3	2	12	780267	
MF 14	1.5	100	16	-	11	9	3	2	12.5	780268	
MF 16	1.5	100	16	-	12	9	3	2	14.5	780269	780289
MF 18	1	110	16	-	14	11	4	2	17	780270	
MF 18	1.5	110	16	-	14	11	4	2	16.5	780271	
MF 20	1.5	125	16	-	16	12	4	2	18.5	780272	780290
MF 22	1.5	125	16	-	18	14.5	4	2	20.5	780273	
MF 24	1.5	140	16	-	18	14.5	4	2	22.5	780274	780291
MF 26	1.5	140	24	-	18	14.5	4	2	24.5	780275	
MF 30	1.5	150	36	-	22	18	4	2	28.5	780276	

CUTTING TAPS FOR BLIND HOLE




**MF**

ISO Metric fine thread DIN 13



series  
model  
material

**DOMINANT  
LT45  
TIN SL  
HSSE**

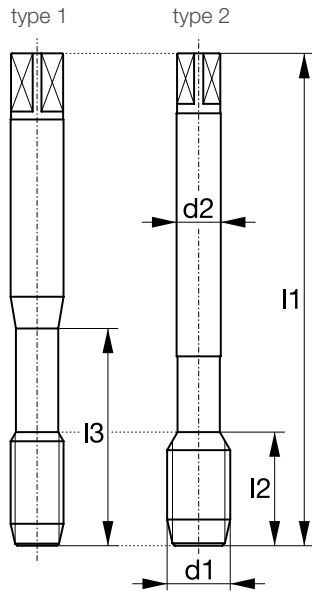

chamfer	C / 2-3
thread tol.	6HX
shank tol.	h9
thread depth	3xD
bore hole	

General dimensions  
~ DIN 374

P	10 - 30			
M	6 - 12			
K	8 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
MF 8	1	180	10	-	6	4.9	3	2	7	780277
MF 10	1	180	10	-	7	5.5	3	2	9	780278
MF 10	1.25	200	12	-	7	5.5	3	2	8.75	780279
MF 12	1.25	200	12	-	9	7	3	2	10.75	780280
MF 12	1.5	200	14	-	9	7	3	2	10.5	780281
MF 16	1.5	200	16	-	12	9	3	2	14.5	780282
MF 20	1.5	250	16	-	16	12	4	2	18.5	780283

**NOTES**

A large grid of small dots, intended for taking notes. The grid consists of approximately 25 columns and 40 rows of dots, spaced evenly across the page.

**CUTTING TAPS FOR THROUGH HOLE**



**G**

British standard  
pipe thread  
DIN EN ISO 228



series  
model  
material

VARIANT  
LT  
TIN  
HSSE

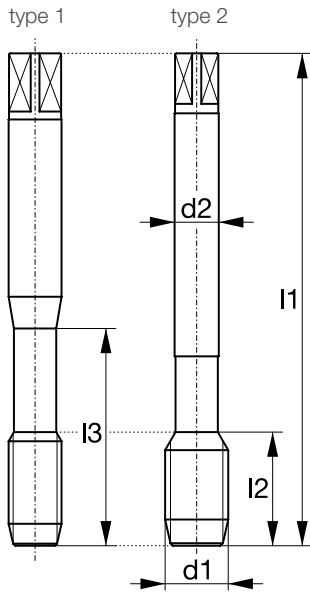

General dimensions  
DIN 5156

chamfer	B / 3-5.5			
thread tol.	-			
shank tol.	h9			
thread depth	3xD			
bore hole				
P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number
G 1/16"	28	90	20	-	6	4.9	3	2	6.8	780314
G 1/8"	28	90	20	-	7	5.5	3	2	8.8	780315
G 1/4"	19	100	22	-	11	9	3	2	11.8	780316
G 3/8"	19	100	22	-	12	9	3	2	15.25	780317
G 1/2"	14	125	25	-	16	12	3	2	19	780318
G 5/8"	14	125	25	-	18	14.5	3	2	21	780319
G 3/4"	14	140	28	-	20	16	4	2	24.5	780320
G 1"	11	160	30	-	25	20	4	2	30.75	780321

**CUTTING TAPS FOR THROUGH HOLE**



**G**

British standard  
pipe thread  
DIN EN ISO 228



series  
model  
material

VARIANT  
LT  
TIN SL  
HSSE

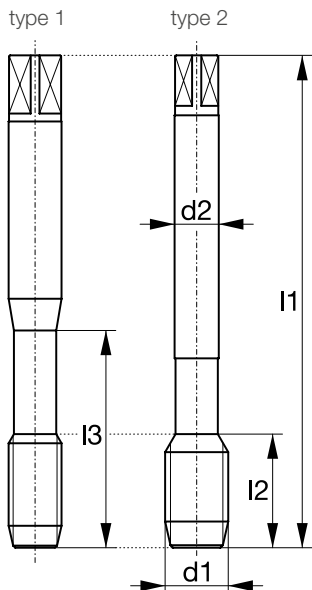

General dimensions  
~ DIN 5156

chamfer	B / 3-5.5			
thread tol.	-			
shank tol.	h9			
thread depth	3xD			
bore hole				
	P	10 - 30		
	M	6 - 12		
	K	5 - 25		
	N	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
G 1/8"	28	180	20	-	7	5.5	3	2	8.8	780322
G 1/4"	19	200	22	-	11	9	3	2	11.8	780323
G 3/8"	19	200	22	-	12	9	3	2	15.25	780324
G 1/2"	14	250	25	-	16	12	3	2	19	780325
G 3/4"	14	280	28	-	20	16	4	2	24.5	780326
G 1"	11	280	30	-	25	20	4	2	30.75	780327

**CUTTING TAPS FOR BLIND HOLE**

**G**



British standard  
pipe thread  
DIN EN ISO 228



series  
model  
material

**DOMINANT  
LT45  
TIN  
HSSE**

**DOMINANT  
LT45  
TIN  
HSSE**

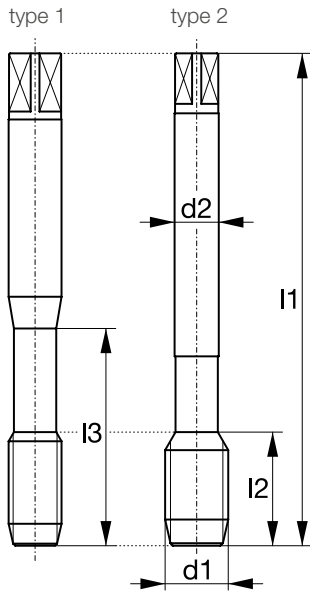

General dimensions  
**DIN 5156**

chamfer	C / 2-3	E / 1.5-2		
thread tol.	-	-		
shank tol.	h9	h9		
thread depth	3xD	3xD		
bore hole				
P	10 - 30	10 - 30		
M	6 - 12	6 - 12		
K	8 - 25	8 - 25		
N	10 - 40	10 - 40		

**i** For detailed cutting speeds please refer to the application table on page 4.

$\text{Ø}d_1$	P	$l_1$	$l_2$	$l_3$	$\text{Ø}d_2$	a	N	type		identification number
G 1/16"	28	90	9.1	-	6	4.9	3	2	6.8	780328
G 1/8"	28	90	9.1	-	7	5.5	3	2	8.8	780329 780342
G 1/4"	19	100	13.4	-	11	9	3	2	11.8	780330 780343
G 3/8"	19	100	13.4	-	12	9	4	2	15.25	780331 780344
G 1/2"	14	125	18.2	-	16	12	4	2	19	780332 780345
G 5/8"	14	125	18.2	-	18	14.5	4	2	21	780333
G 3/4"	14	140	28	-	20	16	4	2	24.5	780334 780346
G 1"	11	160	30	-	25	20	4	2	30.75	780335 780347



**CUTTING TAPS FOR BLIND HOLE**



**G**

British standard  
pipe thread  
DIN EN ISO 228



series  
model  
material

**DOMINANT  
LT45  
TIN SL  
HSSE**

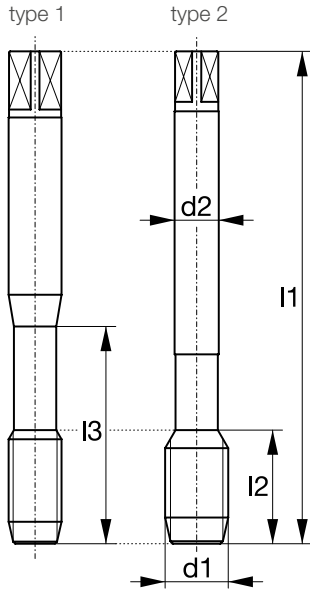

chamfer C / 2-3  
thread tol. -  
shank tol. h9  
thread depth 3xD  
bore hole



General dimensions  
~ DIN 5156

P	10 - 30			
M	6 - 12			
K	8 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
G 1/8"	28	180	9.1	-	7	5.5	3	2	8.8	780336
G 1/4"	19	200	13.4	-	11	9	3	2	11.8	780337
G 3/8"	19	200	13.4	-	12	9	4	2	15.25	780338
G 1/2"	14	250	18.2	-	16	12	4	2	19	780339
G 3/4"	14	280	28	-	20	16	4	2	24.5	780340
G 1"	11	280	30	-	25	20	4	2	30.75	780341

**CUTTING TAPS FOR THROUGH HOLE**



**UNC**

Unified coarse thread ASME B1.1



series  
model  
material

VARIANT  
LT  
TIN  
HSSE

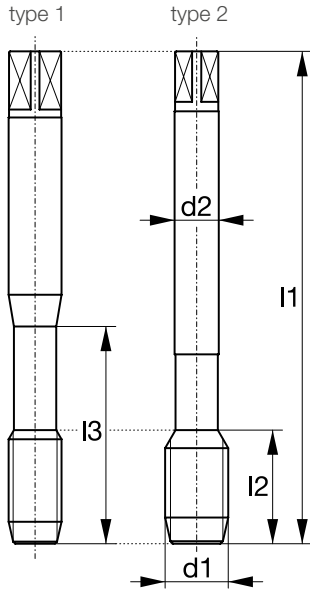

chamfer	B / 3-5.5
thread tol.	2BX
shank tol.	h9
thread depth	3xD
bore hole	

General dimensions  
DIN 2184-1

P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
UNC No2	- 56	45	9	-	2.8	2.1	2	1	1.85	780348
UNC No4	- 40	56	11	18	3.5	2.7	2	1	2.35	780349
UNC No5	- 40	56	11	18	3.5	2.7	3	1	2.65	780350
UNC No6	- 32	56	12	20	4	3	3	1	2.85	780351
UNC No8	- 32	63	13	21	4.5	3.4	3	1	3.5	780352
UNC No10	- 24	70	16	25	6	4.9	3	1	3.9	780353
UNC No12	- 24	80	17	30	6	4.9	3	1	4.5	780354
UNC 1/4"	- 20	80	19	30	7	5.5	3	1	5.1	780355
UNC 5/16"	- 18	90	22	35	8	6.2	3	1	6.6	780356
UNC 3/8"	- 16	100	24	39	10	8	3	1	8	780357
UNC 1/2"	- 13	110	28	-	9	7	3	2	10.8	780358
UNC 5/8"	- 11	110	32	-	12	9	3	2	13.5	780359
UNC 3/4"	- 10	125	34	-	14	11	3	2	16.5	780360
UNC 7/8"	- 9	140	34	-	18	14.5	3	2	19.5	780361
UNC 1"	- 8	160	38	-	18	14.5	3	2	22.25	780362

**CUTTING TAPS FOR BLIND HOLE**

**UNC**

Unified coarse thread ASME B1.1



series




**DOMINANT  
LT45**

model

**TIN**

material

**HSSE**

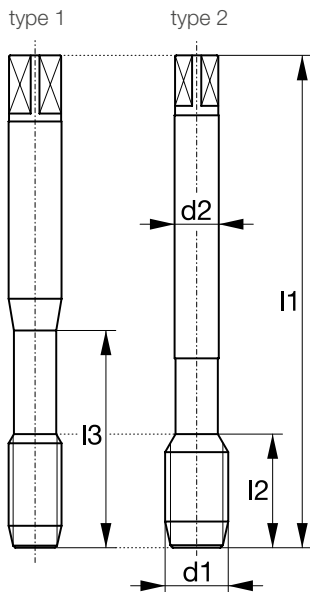

chamfer

C / 2-3

thread tol.

2BX

shank tol.

h9

thread depth

3xD

bore hole



General dimensions  
**DIN 2184-1**

P

10 - 30

M

6 - 12

K

8 - 25

N

10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
UNC No2	- 56	45	3.6	11	2.8	2.1	2	1	1.85	780363
UNC No3	- 48	50	3.6	13	2.8	2.1	2	1	2.1	780364
UNC No4	- 40	56	5.1	18	3.5	2.7	2	1	2.35	780365
UNC No5	- 40	56	5.1	18	3.5	2.7	2	1	2.65	780366
UNC No6	- 32	56	6.4	20	4	3	2	1	2.85	780367
UNC No8	- 32	63	6.4	21	4.5	3.4	2	1	3.5	780368
UNC No10	- 24	70	8.5	25	6	4.9	2	1	3.9	780369
UNC No12	- 24	80	8.5	30	6	4.9	2	1	4.5	780370
UNC 1/4"	- 20	80	10.2	30	7	5.5	2	1	5.1	780371
UNC 5/16"	- 18	90	11.3	35	8	6.2	3	1	6.6	780372
UNC 3/8"	- 16	100	12.7	39	10	8	3	1	8	780373
UNC 1/2"	- 13	110	15.6	-	9	7	3	2	10.8	780374
UNC 5/8"	- 11	110	18.5	-	12	9	3	2	13.5	780375
UNC 3/4"	- 10	125	25.4	-	14	11	4	2	16.5	780376
UNC 7/8"	- 9	140	28.2	-	18	14.5	4	2	19.5	780377
UNC 1"	- 8	160	31.8	-	18	14.5	4	2	22.25	780378

**CUTTING TAPS FOR THROUGH HOLE**




**UNF**


Unified fine thread  
ASME B1.1



series  
model  
material

VARIANT  
LT  
TIN  
HSSE

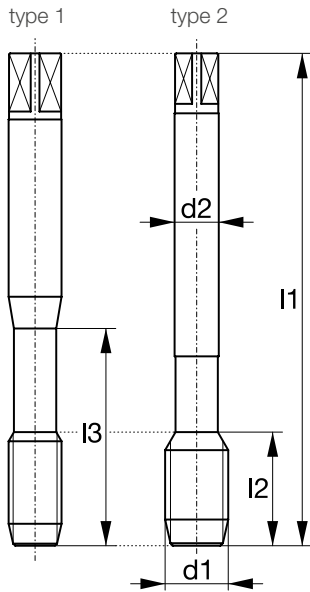


chamfer	B / 3-5.5			
thread tol.	2BX			
shank tol.	h9			
thread depth	3xD			
bore hole				

General dimensions  
DIN 2184-1

P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
UNF No2	- 64	45	9	-	2.8	2.1	2	1	1.85	780379
UNF No3	- 56	50	9	-	2.8	2.1	2	1	2.15	780380
UNF No4	- 48	56	11	18	3.5	2.7	2	1	2.4	780381
UNF No5	- 44	56	11	18	3.5	2.7	3	1	2.7	780382
UNF No6	- 40	56	12	20	4	3	3	1	2.95	780383
UNF No8	- 36	63	13	21	4.5	3.4	3	1	3.5	780384
UNF No10	- 32	70	16	25	6	4.9	3	1	4.1	780385
UNF 1/4"	- 28	80	19	30	7	5.5	3	1	5.5	780386
UNF 5/16"	- 24	90	22	35	8	6.2	3	1	6.9	780387
UNF 3/8"	- 24	90	20	35	10	8	3	1	8.5	780388
UNF 7/16"	- 20	100	24	-	8	6.2	3	2	9.9	780389
UNF 1/2"	- 20	100	22	-	9	7	3	2	11.5	780390
UNF 9/16"	- 18	100	22	-	11	9	3	2	12.9	780391
UNF 5/8"	- 18	100	22	-	12	9	3	2	14.5	780392
UNF 3/4"	- 16	110	25	-	14	11	3	2	17.5	780393
UNF 7/8"	- 14	125	25	-	18	14.5	3	2	20.4	780394
UNF 1"	- 12	140	28	-	18	14.5	3	2	23.25	780395

**CUTTING TAPS FOR BLIND HOLE**



**UNF**

Unified fine thread  
ASME B1.1



series  
model  
material

**DOMINANT**  
LT45  
**TIN**  
HSSE

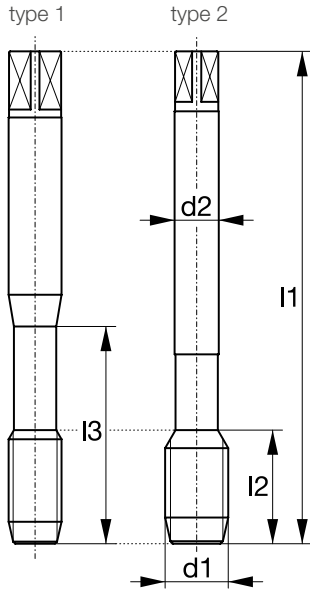

chamfer

C / 2-3

thread tol.

2BX

shank tol.

h9

thread depth

3xD

bore hole



General dimensions  
**DIN 2184-1**

P

10 - 30

M

6 - 12

K

8 - 25

N

10 - 40

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
UNF No2	- 64	45	3.6	11	2.8	2.1	2	1	1.85	780396
UNF No3	- 56	50	3.6	13	2.8	2.1	2	1	2.15	780397
UNF No4	- 48	56	5.1	18	3.5	2.7	2	1	2.4	780398
UNF No5	- 44	56	5.1	18	3.5	2.7	2	1	2.7	780399
UNF No6	- 40	56	6.4	20	4	3	2	1	2.95	780400
UNF No8	- 36	63	6.4	21	4.5	3.4	2	1	3.5	780401
UNF No10	- 32	70	8.5	25	6	4.9	2	1	4.1	780402
UNF No12	- 28	80	8.5	30	6	4.9	2	1	4.6	780403
UNF 1/4"	- 28	80	10.2	30	7	5.5	2	1	5.5	780404
UNF 5/16"	- 24	90	11.3	35	8	6.2	3	1	6.9	780405
UNF 3/8"	- 24	90	12.7	35	10	8	3	1	8.5	780406
UNF 7/16"	- 20	100	14.5	-	8	6.2	3	2	9.9	780407
UNF 1/2"	- 20	100	15.6	-	9	7	3	2	11.5	780408
UNF 9/16"	- 18	100	16.9	-	11	9	3	2	12.9	780409
UNF 5/8"	- 18	100	18.5	-	12	9	3	2	14.5	780410
UNF 3/4"	- 16	110	25.4	-	14	11	4	2	17.5	780411
UNF 7/8"	- 14	125	28.2	-	18	14.5	4	2	20.4	780412
UNF 1"	- 12	140	31.8	-	18	14.5	4	2	23.25	780413

**CUTTING TAPS FOR THROUGH HOLE**




**STI  
EG-M**

STI Metric ISO  
thread DIN 8140



series
model
material

**VARIANT**  
LT  
TIN  
HSSE

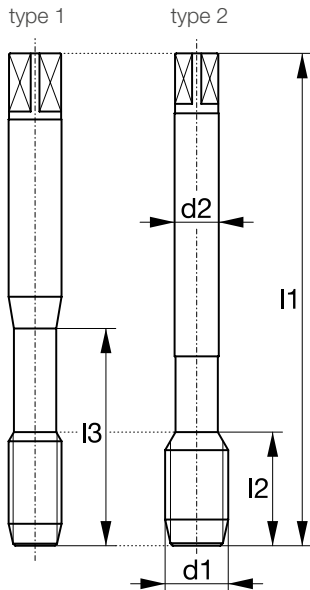

chamfer	B / 3-5.5			
thread tol.	6HX mod			
shank tol.	h9			
thread depth	3xD			
bore hole				

**General dimensions  
DIN 40435**

P	10 - 30			
M	6 - 12			
K	5 - 25			
N	10 - 40			

**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number
EG-M 2	0.4	50	9	-	2.8	2.1	2	1	2.1	780292
EG-M 2.5	0.45	56	11	18	3.5	2.7	3	1	2.65	780293
EG-M 3	0.5	63	13	21	4.5	3.4	3	1	3.15	780294
EG-M 4	0.7	70	16	25	6	4.9	3	1	4.2	780295
EG-M 5	0.8	80	19	30	6	4.9	3	1	5.25	780296
EG-M 6	1	90	22	35	8	6.2	3	1	6.3	780297
EG-M 8	1.25	100	24	39	10	8	3	1	8.4	780298
EG-M 10	1.5	100	29	-	9	7	3	2	10.5	780299
EG-M 12	1.75	110	30	-	11	9	3	2	12.5	780300
EG-M 16	2	125	34	-	14	11	3	2	16.5	780301
EG-M 20	2.5	160	34	-	18	14.5	3	2	20.8	780302

**CUTTING TAPS FOR BLIND HOLE**




**STI  
EG-M**

STI Metric ISO  
thread DIN 8140



series
model
material

**DOMINANT  
LT45  
TIN  
HSSE**

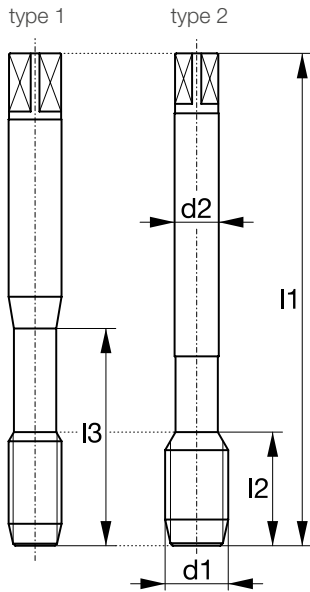

**General dimensions  
DIN 40435**


chamfer	E / 1.5-2			
thread tol.	6HX mod			
shank tol.	h9			
thread depth	3xD			
bore hole				
P	10 - 30			
M	6 - 12			
K	8 - 25			
N	10 - 40			


**i** For detailed cutting speeds please refer to the application table on page 4.

$\varnothing d_1$	P	$l_1$	$l_2$	$l_3$	$\varnothing d_2$	a	N	type		identification number
EG-M 2	0.4	50	4.5	13	2.8	2.1	2	1	2.1	780303
EG-M 2.5	0.45	56	5	18	3.5	2.7	3	1	2.65	780304
EG-M 3	0.5	63	5	21	4.5	3.4	3	1	3.15	780305
EG-M 4	0.7	70	7	25	6	4.9	3	1	4.2	780306
EG-M 5	0.8	80	8	30	6	4.9	3	1	5.25	780307
EG-M 6	1	90	10	35	8	6.2	3	1	6.3	780308
EG-M 8	1.25	100	13	39	10	8	3	1	8.4	780309
EG-M 10	1.5	100	15	-	9	7	3	2	10.5	780310
EG-M 12	1.75	110	18	-	11	9	3	2	12.5	780311
EG-M 16	2	125	20	-	14	11	4	2	16.5	780312
EG-M 20	2.5	160	25	-	18	14.5	4	2	20.8	780313

**CUTTING TAPS FOR THROUGH AND BLIND HOLE**

<b>NPT</b>	American standard taper pipe thread ASME B1.20.3 tapered 1:16		series	<b>DOMINANT</b> LT40			
			model	<b>TIN</b>			
			material	HSSE			

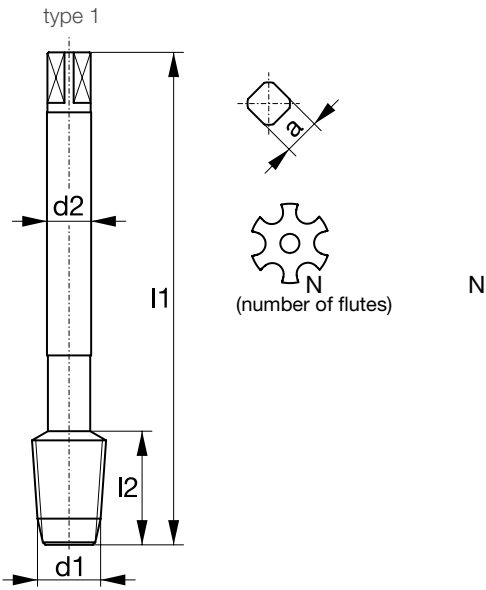


chamfer	C / 2-3			
thread tol.	-			
shank tol.	h9			
thread depth	-			
bore hole				

General dimensions  
~ DIN 5156

P	2-8			
M	-			
K	1-8			
N	1-8			

**i** For detailed cutting speeds please refer to the application table on page 4.

Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a	N	type		identification number
NPT 1/16"	27	90	18	-	6	4.9	3	2	6.15	780414
NPT 1/8"	27	90	19	-	7	5.5	3	2	8.4	780415
NPT 1/4"	18	100	28	-	11	9	3	2	11.1	780416
NPT 3/8"	18	100	28	-	12	9	4	2	14.3	780417
NPT 1/2"	14	125	35	-	16	12	4	2	17.9	780418
NPT 3/4"	14	140	35	-	20	16	4	2	23.2	780419
NPT 1"	11.5	160	45	-	25	20	4	2	29	780420



**NOTES**

A large grid of small dots for taking notes, covering the majority of the page.

**NOTES**

A large grid of small dots for taking notes, covering most of the page.

# Discover our main catalogue...



**BASS**  
TECHNIK FÜR GEWINDE

**Gewindelocher**  
colt tipo / tarauso à filettare / resaca à rosar / taraboreador

Typenbezeichnung / type / tipo / tipo	DURAMAX 1 H	DURAMAX 1 M	DURAMAX 1 H	DURAMAX 1 M
<b>M-Metrisches ISO-Regelgewinde DIN 13</b> ISO Metric coarse thread DIN 13 Filetagemétrica ISO DIN 13 Rosca métrica ISO DIN 13				
<b>DIN 2174</b>				
<b>Bezeichnung / name / type de tara / tipo / forma de aparelho</b>				
<b>Einsatzgebiet / application / aplicación</b> adatto per lavorazione di / aptitudao	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1
<b>Ausführung / model / realización / modelo / modelo</b>	TN	KA TN	SB TN	TN
<b>Werkstoff / tool material / substrat / substrato / material</b>	HSS-E-PM	HSS-E-PM	HSS-E-PM	HSS-E-PM
<b>Gewindelocher / Thread miller / taraboreador de filete / taraboreador de rosca / taraboreador de rosca / taraboreador de rosca</b>	GRK	GRK	GRK	GRK
<b>Schulterbreite / chamfer tolerance / tolerancia de quete / tolerancia de gombro / tolerancia del mango</b>	H6	H6	H6	H6
<b>Anschliff / chamfer / entree / reboco / entrada</b>	C/2-3	C/2-3	C/2-3	C/2-3

Ød	P	L	l <sub>1</sub>	l <sub>2</sub>	Ød <sub>1</sub>	Ød <sub>2</sub>	z	GT	BT	ID
M 3	0.5	55	10	18	3.2	2.7	2.8		107190	
M 4	0.7	63	12	21	4.5	3.4	3.7		107194	
M 5	0.8	70	14	25	5	4.9	4.65		107196	107200
M 6	1	80	16	30	6	4.9	5.55		107202	107204
M 8	1.25	90	18	35	8	6.2	7.25		107208	107210
M 10	1.5	100	20	40	10	8	8.25		107216	107218

**BASS**  
TECHNIK FÜR GEWINDE

**Gewindelocher**  
colt tipo / tarauso à filettare / resaca à rosar / taraboreador

Typenbezeichnung / type / tipo / tipo	DURAMAX 2 H	DURAMAX 2 M	DURAMAX 2 H
<b>M-Metrisches ISO-Regelgewinde DIN 13</b> ISO Metric coarse thread DIN 13 Filetagemétrica ISO DIN 13 Rosca métrica ISO DIN 13			
<b>DIN 2174</b>			
<b>Bezeichnung / name / type de tara / tipo / forma de aparelho</b>			
<b>Einsatzgebiet / application / aplicación</b> adatto per lavorazione di / aptitudao	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1	1.1-1.8 / 2.1-2.8 4.1-6.3 8.2-8.7 / 7.1
<b>Ausführung / model / realización / modelo / modelo</b>	TN	KA TN	SB TN
<b>Werkstoff / tool material / substrat / substrato / material</b>	HSS-E-PM	HSS-E-PM	HSS-E-PM
<b>Gewindelocher / Thread miller / taraboreador de filete / taraboreador de rosca / taraboreador de rosca / taraboreador de rosca</b>	GRK	GRK	GRK
<b>Schulterbreite / chamfer tolerance / tolerancia de quete / tolerancia de gombro / tolerancia del mango</b>	H6	H6	H6
<b>Anschliff / chamfer / entree / reboco / entrada</b>	C/2-3	C/2-3	C/2-3

Ød	P	L	l <sub>1</sub>	l <sub>2</sub>	Ød <sub>1</sub>	Ød <sub>2</sub>	z	GT	BT	ID
M 17	1.75	110	24	5	7	7.1			030162	030167
M 14	2	110	25	11	8	7.1			034814	030307
M 16	2	115	27	12	9	7.1			030166	030177
M 18	2.5	125	30	14	11	7.1			030168	030169
M 20	2.5	140	32	16	12	7.1			030170	030171
M 22	2.5	140	32	16	14.8	20.8			030174	030175
M 24	3	160	36	18	14.8	22.8			034815	030176
M 27	3	160	36	20	15	25.8			030178	030179
M 30	3.5	180	40	22	18	28.3			030180	030181
M 33	3.5	180	40	25	20	31.3			030182	030183
M 36	4	200	45	28	22	34.1			030184	030185
M 39	4	200	45	30	24	37.1			030186	030187
M 42	4.5	230	50	32	24	39.8			030188	030189
M 45	4.5	230	50	35	28	42.8			030190	030191
M 48	5	250	55	35	29	45.8			030192	030193

# and our catalogue for thread milling cutters!



**BASS**  
TECHNIK FÜR GEWINDE

**WIM-Gewindelocher GFA**  
colt grande filetear milling cutter GFA / Fresa à filetear GFA em carburo metálico / Tara a filetear em metal duro GFA / Fresa de rosado de metal duro GFA

Typenbezeichnung / type / tipo / tipo	GFA N	GFA M
<b>M-Metrisches ISO-Feingewinde DIN 13</b> ISO Metric fine thread DIN 13 Filetagemétrica ISO a uso F. DIN 13 Rosca métrica ISO a uso F. DIN 13		
<b>Gewindelocher / Thread miller / taraboreador de filete / taraboreador de rosca / taraboreador de rosca / taraboreador de rosca</b>	2 x D	2 x D
<b>Einsatzgebiet / application / aplicación</b> adatto per lavorazione di / aptitudao	1.1-1.8 / 2.1-2.8 3.1-3.6 / 4.1-4.7 5.1-6.1 / 6.1-6.3 8.1-8.2 / 8.1-8.3	1.1-1.8 / 2.1-2.8 3.1-3.6 / 4.1-4.7 5.1-6.1 / 6.1-6.3 8.1-8.2 / 8.1-8.3
<b>Zylinderschliff / chamfer / entree / reboco / entrada</b>	DN 8/5/4H	DN 8/5/4H
<b>Ausführung / model / realización / modelo / modelo</b>	KA	KA TON

ØD	P	L	l <sub>1</sub>	Ød <sub>1</sub>	z	GT	BT	ID			
W 8	x	0.75	54	19	400	6	3	12	12.5	6.2	030160
W 8	x	1	64	18	505	6	3	16	16.5	7.2	030303
W 10	x	1	64	22	705	8	4	20	23.5	9.0	030161
W 10	x	1.25	64	22	705	8	4	20	21.0	8.8	030162
W 12	x	1	74	26	805	10	4	24	24.5	11.0	030164
W 12	x	1.5	74	26	805	10	4	24	25.0	10.5	030165
W 14	x	1.5	80	30	1195	12	4	28	29.0	12.8	030166
W 16	x	1.5	90	34	1595	14	4	32	33.0	14.5	030167

**BASS**  
TECHNIK FÜR GEWINDE

**WIM-Gewindelocher GFA**  
colt grande filetear milling cutter GFA / Fresa à filetear GFA em carburo metálico / Tara a filetear em metal duro GFA / Fresa de rosado de metal duro GFA

Typenbezeichnung / type / tipo / tipo	GFA N
<b>G-Regelgewinde DIN ISO 228</b> ISO Metric coarse thread DIN ISO 228 Filetagemétrica ISO a uso G. DIN ISO 228 Rosca métrica ISO a uso G. DIN ISO 228	
<b>Gewindelocher / Thread miller / taraboreador de filete / taraboreador de rosca / taraboreador de rosca / taraboreador de rosca</b>	2 x D
<b>Einsatzgebiet / application / aplicación</b> adatto per lavorazione di / aptitudao	1.1-1.8 / 2.1-2.8 3.1-3.6 / 4.1-4.7 5.1-6.1 / 6.1-6.3 8.1-8.2 / 8.1-8.3
<b>Zylinderschliff / chamfer / entree / reboco / entrada</b>	DN 8/5/4H
<b>Ausführung / model / realización / modelo / modelo</b>	KA TON

ØD	P	L	l <sub>1</sub>	Ød <sub>1</sub>	z	GT	BT	ID		
G 18	25	84	21	7.05	8	4	24	20.5	8.8	067240
G 14	19	74	20	9.95	10	4	28	27.5	11.3	067150
G 36	19	30	35	15.80	14	4	34	34.5	15.25	107154
G 12	14	120	44	15.95	15	5	42	42	19	067220



## BASS GmbH

Technik für Gewinde  
Bass-Strasse 1  
97996 Niederstetten  
Deutschland · Germany

Tel.: +49 7932 892-0  
Fax: +49 7932 892-87  
E-Mail: [info@bass-tools.com](mailto:info@bass-tools.com)  
Web: [www.bass-tools.com](http://www.bass-tools.com)



**VDA** AUTOMOTIVE QUALITY  
**6.4**  
MANAGEMENT SYSTEMS

**ISO** QUALITY  
**9001**  
MANAGEMENT SYSTEMS

**ISO** ENVIRONMENTAL  
**14001**  
MANAGEMENT SYSTEMS

**ISO** ENERGY  
**50001**  
MANAGEMENT SYSTEMS

PDF DOWNLOAD



**ZIBTRPRO**  
tehnologija obdelave · vpenjalni sistemi